


**Protective welding screens provide an effective barrier against welding rays, arcs and projections. They're also ideal to divide work areas or separate a workshop's various sectors.**

- Complies with European standard ISO EN 25980:2015-01
- Filters both the visible and invisible light emitted by the welding arc.
- 100% PVC matter, extinguishable and highly resistant (0.4 mm thick).
- Stable frame.
- European made.

**Orange colouring CE** : intermediate transparency for optimum safety, while reducing the welder's lack of light and feeling of isolation.

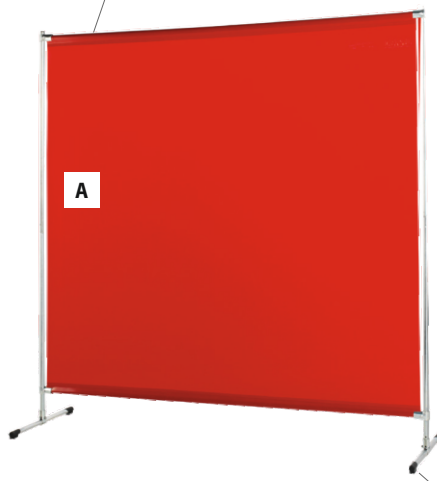

A

**Green colouring T9** : opaque colour, slightly darker than orange, provides greater protection against the arc's light.




B

Fixed support but easily movable (8 kg).

Possible side opening

**Stable fixings** with reinforced eyelets to prevent tearing.

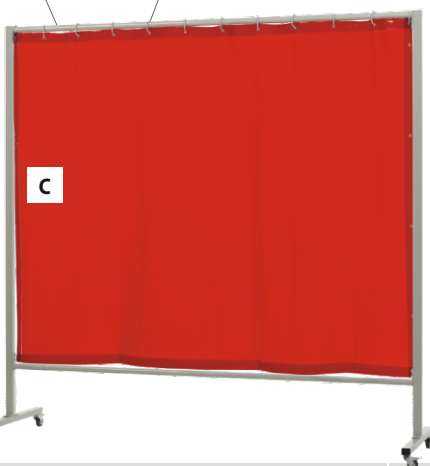

C


**Mobile support** with 4 wheels, 2 of them with brakes.

**Flexible curtain** reinforced by seams over the entire perimeter.



D

Equipped with snap buttons to assemble several curtains.

			Curtain size without frame	kg
A	OPTI 200.O	Orange CE	200 x 200 cm	7.22
B	OPTI 200.G	Green T9	200 x 200 cm	7.08
C	OPTI 215.O	Orange CE	200 x 215 cm	16.11
D	OPTI 140.O	Orange CE	160 x 140 cm	1.38