

MIG-MAG
THREE PHASE
15▷200A

CARMIG

Ref. 032132

Ideal for welding thin metal sheets, it has been designed to ix cars at a minimum current of 15 A. The SMART interface facilitates settings, for considerable time saving.


Intuitive use

The CARMIG simplifies both wire speed and voltage settings.

Thanks to the SMART chart, find the right settings based on metal thickness and wire type.

Then, depending on the charts' recommendations, simply select :

- Voltage (7 positions knob)
- Wire speeder by setting the potentiometer on the indicated colour zone and adjust if needed.

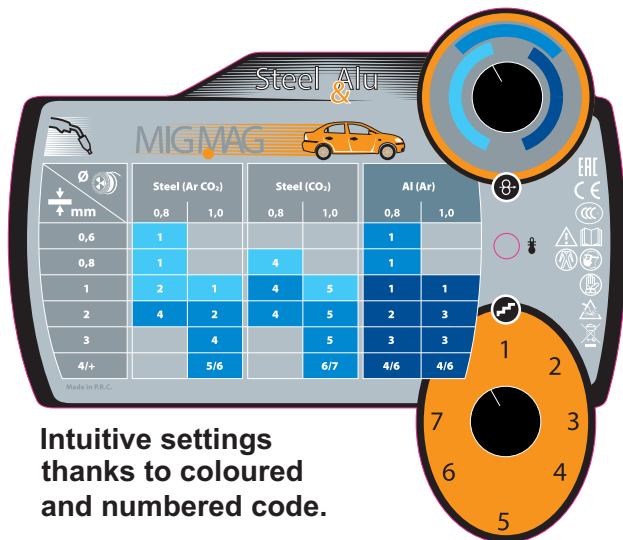

Intuitive settings thanks to coloured and numbered code.



Professional level specification

- Welding :
 - Steel / stainless / CuSi3 / CuAl8 wire from Ø 0.6 to 1.0 mm.
 - Alu wire (AlMg5) of Ø 0.8 mm.
- 400 V three phase power supply.
- EURO Torch 150 A - 3 m.
- Wire feeder motor 2 rollers of 40 W.
- Takes 5 and 15kg wire reels (200 and 300 m).
- Supports gas bottles up to 10 m³.
- Compatible with an electrical generator (5 kVA).
- Mobile thanks to its 4 wheels including 2 pivoting wheels.

Supplied with :

- 1 torch 150 A - 3 m
- 1 earth clamp 200 A - 3 m (regulator not included)



Support Gas bottle
4 m3 - 10 m3

50/60hz	AM	min ▷ max	Ø mm	Ø mm		équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica		EN60974-1 (40°C)		cm/kg	Protected & compatible POWER GENERATOR (+/- 15%)
				200	300	IA (60%)	X% (I2 max)				
400V 3~	10A	15-200A	0.6 - 1.0			0.6 - 0.8	0.8	110A	150A 25%	47x77x79 / 50	5 kVA